



A B C D E F G H

1
接线图
Wiring Diagram

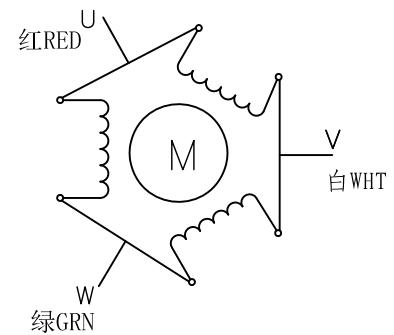

2
规格 SPECIFICATIONS

3	1 相数 Number of Phase	3
	2 步距角 Step Angle	1.2° ±5%
	3 保持力矩 Holding Torque	60 Kg.cm
	4 电压 Voltage	6.0 VDC
	5 电流 Current	6.0 A
	6 相电阻 Phase Resistance (20°C)	0.98 ±10% Ω
	7 相电感 Phase Inductance (1KHz)	6.0 ±20% mH
	8 转子惯量 Rotor Inertia	g • cm ²
	9 绝缘电阻 Insulation Resistance	100M Ω 500VDC
	10 绝缘等级 Insulation Class	B (130°C)
	11 环境温度 Ambient Temperature	-20°C to 50°C
	12 环境湿度 Ambient Humidity	15% to 95%
5	13 电机重量 Motor Weight	Approx xx kg
	14	

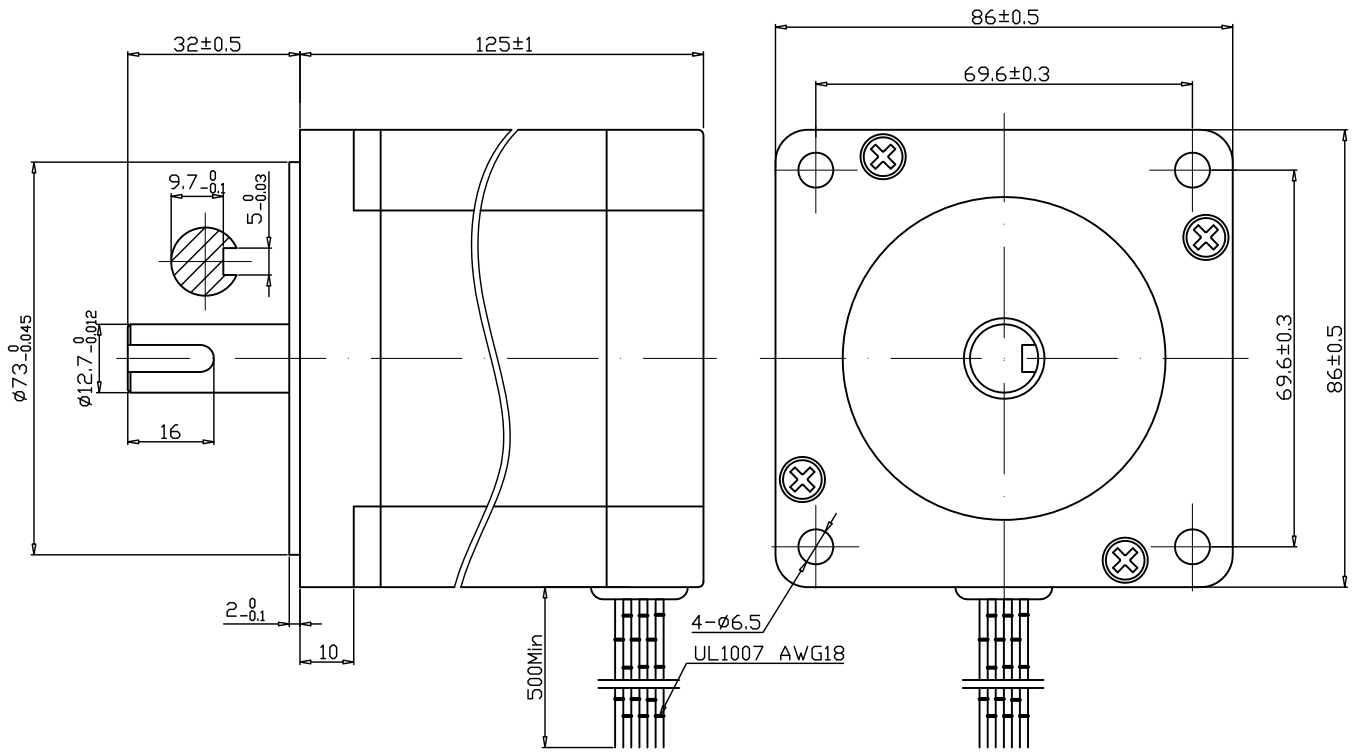

6	V2.0	换版面, 修正前盖安装孔与法兰厚度	20161128
	V1.0	xxx	20090817
	REV.	版本记录 REVISION RECORD	DATE

Unit:mm 第一角画法 First angle method 未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m 未注形状与位置尺寸公差 Geometrical tolerances for features without individual tolerance indications GB/T 1184-k eqv ISO 2768-2:k	设计 DESIGN 戴康健 20121201	校核 CHECK XH 20161128	工艺 TECHNOLOGY	标准化 STANDARD	批准 APPROVE
	NAMES	SINGATURE	DATE		

CW-motor
常州创伟电机电器有限公司
Changzhou Chuangwei Motor & Electric Apparatus Co.,Ltd
TYPE: HYBRID STEPPING MOTOR SCALE XX Rev. 2.0 SHEET 1 OF 1
Model: 86BHP127-600A-32J

A B C D E F G H